


SPULENTYPEN

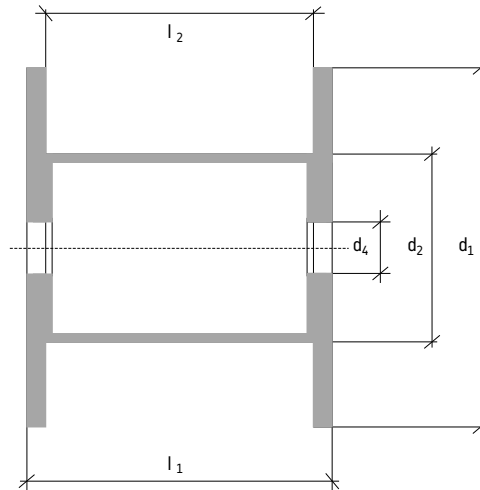

Typ K 40

d₁ 40 mm
 d₂ 25 mm
 d₄ 15 mm
 l₁ 50 mm

~ 100 g Draht



Typ K 50

d₁ 50 mm
 d₂ 32 mm
 d₄ 15 mm
 l₁ 50 mm

~ 200 g Draht



Typ K 63

d₁ 63 mm
 d₂ 40 mm
 d₄ 15 mm
 l₁ 63 mm

~ 300 g Draht



Typ K 80

d₁ 80 mm
 d₂ 50 mm
 d₄ 24 mm
 l₁ 80 mm

~ 800 g Draht



Typ K 100

d₁ 100 mm
 d₂ 63 mm
 d₄ 24 mm
 l₁ 100 mm

~ 1.3 kg Draht



Typ K 125

d₁ 125 mm
 d₂ 80 mm
 d₄ 24 mm
 l₁ 125 mm

~ 2.3 kg Draht



Typ K 160

d₁ 160 mm
 d₂ 100 mm
 d₄ 34 mm
 l₁ 160 mm

~ 5 kg Draht



Typ K 200

d₁ 200 mm
 d₂ 125 mm
 d₄ 34 mm
 l₁ 200 mm

~ 11 kg Draht



Typ K 250

d₁ 250 mm
 d₂ 160 mm
 d₄ 34 mm
 l₁ 200 mm

~ 18 kg Draht



Typ SD 300 K

d₁ 300 mm
 d₂ 212 mm
 d₄ 51,5 mm
 l₁ 103 mm

~ 12 kg Draht



Typ SH 390 K

d₁ 390 mm
 d₂ 310 mm
 d₄ 305 mm
 l₁ 85 mm


~ 15 kg Draht



Typ SH 460 K

d₁ 460 mm
 d₂ 319 mm
 d₄ 305 mm
 l₁ 105 mm

~ 40 kg Draht



Typ DWF 355/30, /36

d₁ 355 mm
 d₂ 244 mm
 d₄ 30 mm, 36 mm
 l₁ 300 mm

~ 40 kg Draht



Typ DWF 500 / 36

d₁ 500 mm
 d₂ 160 mm
 d₄ 36 mm
 l₁ 350 mm

~ 90 kg Draht

RINGGRÖSSEN



Innendurchmesser: 300 – 500mm
 Drahtdurchmesser: min. 0.5mm

Weitere Spulen, Ringe oder Auslieferungsarten auf Anfrage