










## DIMENSIONS AND DIAMETERS

Execution	Description	Dimensions	Tolerances
	Micro Flat Wire	Thickness: 0.01 – 2.00 mm Width: 0.05 – 3.00 mm	acc. to specification
	Square / Rectangle	Thickness: 0.20 – 2.00 mm Width: 0.20 – 3.00 mm	acc. to specification
	Precision Wire	Diameter: 0.005 – 4.00 mm	acc. to DIN or from ±0.0005 mm
	Special Profiles	A <sub>min</sub> : 0.50 mm <sup>2</sup> A <sub>max</sub> : 6.00 mm <sup>2</sup>	∅ ± 0.0020 mm ∅ ± 0.1000 mm
	Pivots & Pins	Diameter: 0.050 – 4.00 mm Length: 5 – 1'000 mm	0.001 – 0.02 mm ±0.005 – 1.00 mm
	Bars, levelled	Diameter: 0.150 – 4.00 mm Length: 1'000 – 4'500 mm	0.001 – 0.02 mm 0.200 – 1.00 mm

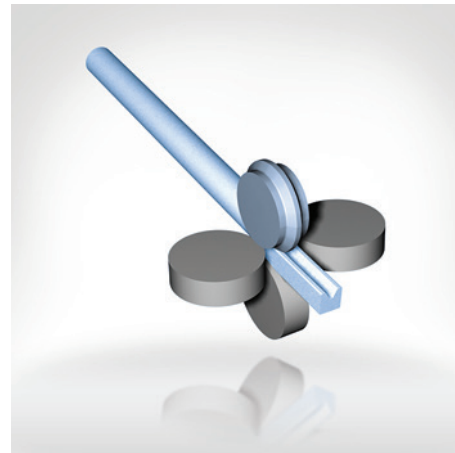

Materials: Stainless Steel, Carbon Steel, Non-ferrous Metals, Titanium, Tungsten, Precious metals, Special Grades  
 Strengths: According to customer's specifications  
 Type of delivery: According to customer's specifications  
 Delivery quantity: Small quantities possible